


PRODUCT RANGE



WIRING DEVICES



MINIATURE CIRCUIT BREAKER



DISTRIBUTION BOARD



MOULDED CASE CIRCUIT BREAKER



HRC FUSES



ONLOAD CHANGEOVER




VERTICAL FUSE SWITCH

ABOUT US

Established in 1958, IndoAsian is an Indian origin brand with a legacy of consumer trust. As industry pioneers, we were the first to produce 10kA breaking capacity MCBs and RCCBs in India and continue to deliver high-quality products suited to the Indian market. Designing more with less and offering great value for money is at the heart of everything we do. We innovate so that our products make sense, without compromising on quality.

Thus, we measure success when every consumer who experiences our offering says, "this makes sense".

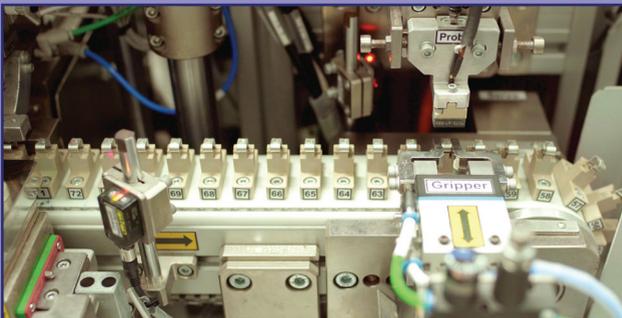

Presence in 60+ countries & counting

OUR PRODUCT BASKET

- PROTECTION DEVICES
- DISTRIBUTION BOARDS
- POWER PRODUCTS
- WIRING DEVICES
- TRADITIONAL PRODUCTS
- INFRA PRODUCTS



MINIATURE CIRCUIT BREAKER



- Confirms to IS/IEC 60898-1
- Current Rating Range 0.5A to 63A, 50Hz, AC MCB*
- Available in SP/ SPN/ DP/ TP/ TPN/ FP version in B, C* & D* tripping curves
- Rated Short-Circuit breaking capacity, Icn 10kA
- Line Load Reversibility
- Energy Limitation Class 3
- Operating Voltage 240V /415V AC, 60V DC per pole
- CE Marked
- Common clip on type accessories like Aux. Contact, alarm contact, etc. for entire range

—optipro™—
ALL THAT YOU NEED

HIGH RATING AC CIRCUIT BREAKER



- Confirms to IEC 60947-2
- Range 80A to 125A, 50Hz, AC MCB
- Available in SP/ DP/ TP/ FP version
- Rated short-circuit breaking capacity, Icu 10kA
- Operating voltage 240V/ 415V AC, 60V DC per pole.
- CE Marked
- Large size terminals 50 sq.mm

—optipro™—
ALL THAT YOU NEED


DC CIRCUIT BREAKER



- Confirms to IEC 60947-2
- Range 0.5A to 63A, DC MCB
- Available in SP & DP Version
- Rated short circuit breaking capacity, Icu 6kA
- CE Marked
- Operating voltage upto 250V supply
- Large size terminals 35 sq.mm

—optipro™—
ALL THAT YOU NEED

ISOLATOR

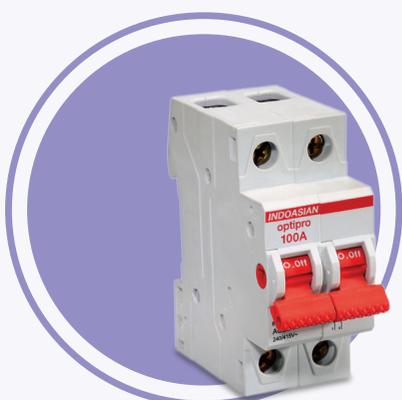

- Confirms to IEC 60947-3
- Range 40A to 125A, 50Hz, AC
- Available in DP/ TP/ FP version
- CE marked
- Large size terminals 35 sq. mm
- Operating voltage 240V/415V AC, 60V DC per pole

—optipro™—
ALL THAT YOU NEED


RESIDUAL CURRENT CIRCUIT BREAKER



- ISI/CE marked as per IS/IEC 12640-1
- Range 25A to 63A, 50Hz, AC class
- Sensitivity range: 30mA/ 100mA/ 300mA
- Available in DP/FP version
- Rated conditional short circuit current Icc 10kA
- Large size terminals 35 sq.mm
- Operating voltage 240V/415V AC

—optipro™—
ALL THAT YOU NEED

RCD ADD ON BLOCK

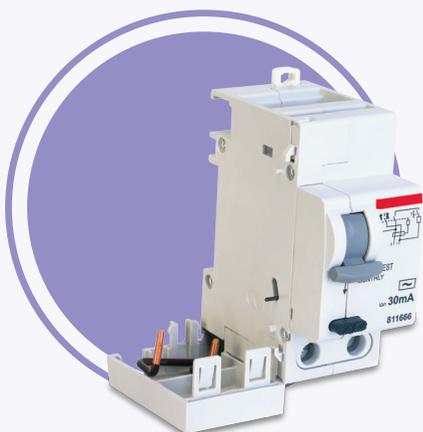

- Confirms to IEC 60947-2
- Range 6A to 63A, 50Hz
- Sensitivity range: 30mA/ 100mA/ 300mA
- Rated conditional short circuit current Icc 10kA
- Degree of protection IP20
- Large size terminals 35 sq.mm
- Flexibility to use MCB of any tripping & curve

—optipro™—
ALL THAT YOU NEED

DISTRIBUTION BOARDS



- Innovative Design
- Wide range of DB's: SPN/ TPN/ VTPN/ PPI/ 7-Segment/ Flexy DB
- Available in single & double door both types
- Degree of Protection Upto IP54
- Mechanical strength IK08
- Isolated & shrouded neutral bar
- Cement spill protector
- Door earthing for user safety
- Circuit identification label

—optipro™—
ALL THAT YOU NEED

DB SUITABLE FOR MIVON CONSTRUCTION



- Compact design
- Designed as per IEC61439-3
- Degree of protection IP43
- Mechanical strength Ik09
- Increased sheet thickness
- Cement spill protector
- Door earthing for user safety
- Anti-insertion mark

—optipro™—
ALL THAT YOU NEED

PRODUCT RANGE

GENERAL OVERVIEW

MCCB – FIXED RANGE



- Confirms to IEC 60947-I & II
- Fixed MCCB range 16A to 800A
- Ics=50% Icu, and 100% Icu (for 16kA & 25kA)
- Rated short circuit breaking capacity: 16kA, 25kA, 36kA & 50kA
- Fixed overload & short-circuit current setting
- Wide range of accessories like Aux. contact, alarm contact, spreaders, etc..

—optium™—
ALL THAT YOU NEED

MCCB – ADJUSTABLE RANGE



- Confirms to IEC 60947-II
- Adjustable MCCB range 16A to 250A
- Ics=100% (Icu)
- Available in both thermal magnetic & microprocessor type releases
- Adjustable type overload, short circuit current & earth fault settings
- Switchable thermal memory
- Adjustable neutral overload protection – (50%-100%) x Ir
- Innovative front LED indication (for ready, Overload pre-alarm & Overload).
- Wide range of accessories like Aux. Contact, shunt trip, under voltage, rotary handles, key locks, etc.

—optium™—
ALL THAT YOU NEED

TIME SWITCHES



- Available in analog & digital versions
- DIN channel mounting (single module & three module)
- Degree of protection IP20
- Daily & weekly models with 24hrs programme
- Available with or without battery reserve
- Ambient temperature -10° + 50° C

Dizeit

Save Energy for a Better Tomorrow

LIGHT SENSITIVE SWITCH

- DIN type single module with outer sensor
- Degree of protection IP30
- Operating voltage 230V, 50/60 Hz


TIMELITE DB



- Range from 16A to 110A with analog/digital time switches
- Degree of protection :IP 54
- Aesthetically appealing with locking facility
- Selector switch for selecting time mode, continuous ON mode or permanently OFF mode
- Rating of contractors depends on the wattage of load to be connected
- Available with GSM module for remote access (on-request)

INDOASIAN®
MAKES SENSE

HRC FUSES & FUSE BASES

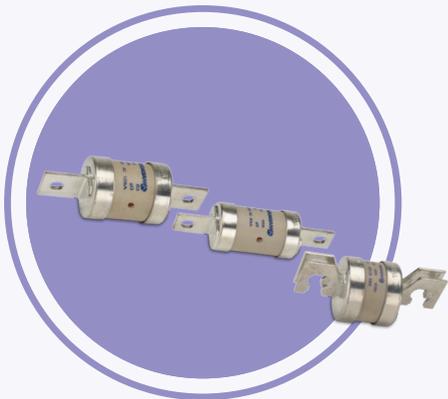

- Confirms to IEC: 60269-2
- Rating available from 2A to 630A
- Breaking capacity: 80kA to 120kA, 500V AC
- Available HRC Fuse link type :- DIN, Cylindrical Bolted & J-Type
- DIN & BS Fuse base fittings are also available
- CE certified
- Low watt loss ensures cool running and longer life
- Fault Indication window: Red pop up indicator comes out instantly on fusing

SWITCH DISCONNECTOR FUSES



- Confirms to IEC: 60947 – 3
- Ratings available from 32A upto 800A in TPN/ TPSN version
- Utilization category AC23A
- Suitable for both BS type & DIN type fuses (SDF)
- Breaking Capacity: 80kA with fuses
- Rated insulation voltage: 1000V AC/ 1500V DC
- Inspection windows to check the contact position
- Auxiliary contacts: 1NO +1NC & 2NO+2NC
- Available in open execution & sheet metal enclosure

CHANGEOVER & BYPASS SWITCH



- Confirms to IEC 60947-3
- On-load changeover range 63A -3150A
- On-load bypass switch range 125A to 630A
- Utilization category AC22, AC23A, AC23B duty
- Self-wiping contact mechanism
- Low temperature rise & operating force
- Door interlock with defeat mechanism and padlock facility
- Available in open execution & sheet metal enclosure

FEEDER PILLAR



- Tested as per IEC 61439 from International laboratory
- Highest current rating available: 2400A
- Short circuit current withstand capacity $I_{cw}=46kA$ (1sec)
- Degree of protection: - upto IP-55
- Operating system voltage – 500V
- Application – used by Utilities (Electricity Board), Residential, Commercial complexes & Industries.

Ambidex

BUS BAR CHAMBER



- Readymade solution for safe power distribution
- Step type design gives more clearance between 2 phases or phase & neutral
- Available in both SPN & TPN configuration
- Insulated bus bars offers more safety to user
- Simple and efficient system configuration
- Easy, flexible and time saving installation

LOAD BANK



- Highly reliable tested solution as per IEC 61439-2
- Available in 3P & 4P MCCB's as an incomer & outgoing
- Busbars with high SC withstanding current 50kA/1sec.
- Wide range of incomer options
- Degree of protection - IP43(DD) & IP30(SD)
- Protection against mechanical impact - IK09
- Incomer supply can be metered with add on metering enclosures

ELVIRA WIRING DEVICES



- Socket with safety shutter
- Shrouded terminals
- Switches & Socket with ISI marking
- High grade Polycarbonate material
- Fire retardant & UV stabilised
- LED Indicator with diffuser.
- Switches tested for 1,00,000 ON/OFF operation
- Laser marking on all products
- **Hospitality products** - MMR, DND & Access Card

ELVIRA
A SENSIBLE SWITCH



COLOUR PLATE

- Trending colours
- Consistent colour tones
- Contemporary finishes
- More resistant to scratches and fading

Also available in



GLINT WIRING DEVICES

Glint™
Welcome Change



- Unique & sleek design
- LED based Indicator
- Edge to edge fitment of plate with surface box
- Switches & socket with ISI marking
- Socket with safety shutter & pencil free operation
- High grade polycarbonate material
- Fire retardant & UV stabilised.



GLINT DOUBLE PLATE

- Aesthetic design
- Suitable for metal flush & wooden boxes
- Comes in both metal & wooden screws
- Range from 1m to 18m

PLUGS



- ISI mark
- Value for money
- 6A & 16A
- Unique aesthetic design allows easy grip

CORPORATE OFFICE:

V. J. Business Towers, A-6, 1st Floor, Sector-125, Noida-201301, U.P., India. Ph.: +91-0120-3305100
E-mail: Customer.care@indoasian.com, Website: www.indoasian.com

CUSTOMER SUPPORT EXECUTIVE:

V. J. Business Towers, A-6, 1st Floor, Sector-125, Noida-201301, U.P., India.
Ph.: +91-0120-3305111 E-mail: Customer.care@indoasian.com

NORTH

Regional Sales office

DELHI NCR

V. J. Business Towers,
A-6, Ground Floor,
Sector-125, Noida-201301
Ph.: 0120-3365300

Branch offices

LUCKNOW

301, 3rd Floor, Chintel House,
Station Road,
Lucknow-226001
Ph.: 0522-4013210

Branch offices

CHANDIGARH

S.C.O.-11, 2nd Floor,
Sector-26, Madhya Marg,
Chandigarh-160002
Ph.: 0172-3934651

Branch offices

JAIPUR

433, 4th Floor, Ganpati Plaza,
M. I. Road,
Jaipur-302001
Ph.: 0141-4113528

SOUTH

Regional Sales office

BANGALORE

787, 1st Floor "Skyline Vista",
15th Cross, 100 Feet Ring Road
J P Nagar 1st Phase
Bangalore-560 078
Tel: 080-46219999

Branch offices

CHENNAI

No.5, 1st Floor, Mahalingapuram Main Road,
Nungambakkam,
Chennai-600034
Ph.: 044-28172096, 28170527

Branch offices

COCHIN

Door No.65/1317, Syda Building,
2nd Floor, Kaloor-Kadavanthra Road,
Kaloor, Ernakulam District,
Kochi-682017 (Kerala)
Ph.: 0484-4055581-88

Branch offices

HYDERABAD

312, 3rd Floor,
Amrutha Estates, Himayath Nagar,
Hyderabad-500029
Ph.: 040-66742425

Branch offices

COIMBATORE

Door No. 83,
Dr. Nanjappa Road,
Coimbatore-641018
Ph.: 0422-2302715

WEST

Regional Sales office

MUMBAI

401 & 408, K.P. Arrum,
Marol Morshi Road, Andheri East,
Mumbai-400059
Ph.: 022-61035800

Branch offices

PUNE

1307, 4th Floor, Rajadwar Building,
Off. J. M. Road, Shivaji Nagar,
Pune-411005
Ph.: 8087610722

Branch offices

AHMEDABAD

102, 1st Floor, Shivalik High Street,
Near Mansi Circle, Vastrapur,
Ahmedabad-380015
Ph.: 079-29701351-53

Branch offices

INDORE

202, KK Bafna Arcade,
Janjeerwala Square, Race Course Road,
Indore-452001
Ph.: 0731-4064064

EAST

Regional Sales office

KOLKATA

Raikva Building, Room No. 8, 2nd Floor,
3A Ram Mohan Garden Lane,
Beliaghata E.M.Bypass, Kolkata-700010
Ph.: 033-66041503